

Anritsu Advancing beyond

MT9085 Series ACCESS Master

MT9085A/B/C

1310/1490/1550/1625/1650nm (SMF) 850/1300 nm (MMF)



Fiber Visualizer

Anritsu OTDR

New

MT9085 Series

The next generation of ACCESS Master



Metro Networks

FTTx

Easy to Use Anytime Anywhere

8-inch
e Touch
Screen

Anritsu



Easy


Fiber Visualizer

Fiber events, such as splices, connectors, splitters, etc., are displayed as schematic icons along with loss and reflectance Pass /Fail evaluation results for at-a-glance confirmation.

Fiber Visualizer

Fast Realtime Sweep Mode with High SNR

Supports Various Measurement Environments Realtime measurement, fast sweeping is useful for position identification by bending the fiber, while high-SNR sweeping makes it easy to view the waveform. These two sweep modes can be applied in various measurement environments.

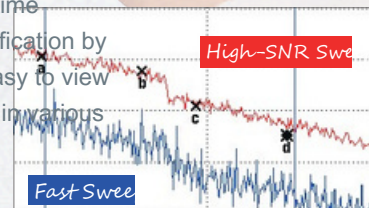

Mobile Fronthaul

Hard keys

Easy Operation



The easy to use rotary knob and hard keys support efficient manual waveform analysis.

Accurate Event Detection and Loss Measurement

Multi-pulse measurement is supported with a 46-dB max. dynamic range and a dead zone of 0.8 m. Measurement of both short fibers of a few meters to long fibers of more than 100 km is supported. Multi-pulse measurements enable accurate loss and reflection measurements between events separated by short distances.

Up to 1 × 128 Branches

Identify events for each splitter and branch information Multiple PON splitters can be identified using high-quality waveforms, and events at each splitter are Pass/Fail evaluated based on preset threshold values.

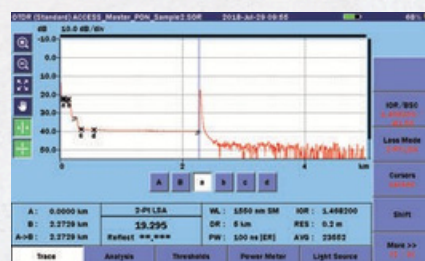

History of Anritsu OTDRs

1980

World-first optical pulse tester

This all-inclusive optical pulse tester was developed with a full range of functions, including a light source and optical power meter for measuring and finding faults in optical fibers.



199

Portable OTDR

With an excellent dynamic range of 35 dB (SNR = 1, pulse width = 10 μs), the shockproof compact portable MW9070A was developed with superior dust and water resistance for on-site work.



2004

First ACCESS Master Series

This first-generation ACCESS Master incorporated an OTDR, OLTS, and visual light source in one handheld unit



2009

OTDR for Deep-Sea Cable Inspection

This OTDR can find faults in deep-sea optical cables up to 12,000 km in length with a measurement resolution of 10 m. Anritsu is the only company capable of testing the full fiber market from the Field to the Submarine.



2009


Mini Size OTDR

This small and lightweight OTDR for fiber maintenance OTDR has a maximum dynamic range of 37 dB.



Optical Fiber Path Evaluation process


Multiple test are completed when evaluating optical fiber which include, fiber end-face inspection, and optical power/optical loss and OTDR measurements. these test can all be executed using a single MT9085 series unit (require built-in options and external hardware options). In addition, data file saved for each measurement can be transferred over WLAN or Bluetooth network connection for further management and processing using dedicated PC tools.

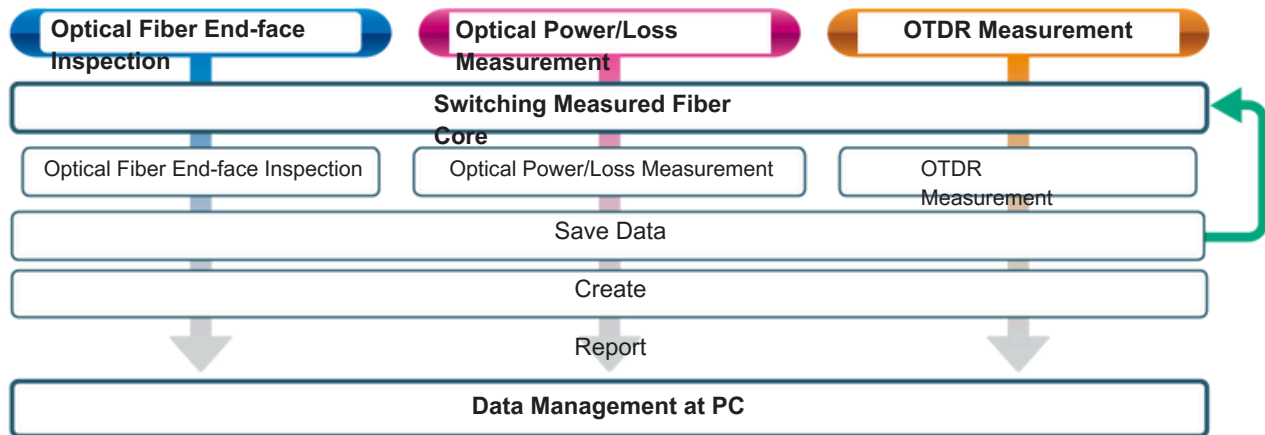**OTDR Measurement**

OTDR measurement is a basic function of the MT9085 series. The models in the series support different wavelengths matching the measurement environment. The Fiber Visualizer function displays fiber events as schematic icons for at-a-glance confirmation of splices and connectors along the fiber length with automatic Pass/Fail evaluation of fiber loss and reflectance. Moreover, manual analysis of loss and reflectance using a combination of the rotary knob, hard keys and marker operations assures the same easy operability as previous ACCESS Master series. The excellent waveform quality supports both PON measurements as well as realtime short to long-distance fiber measurements.

MT9085 Series OTDR Product Line

Option	Wavelength	Dynamic	Featur
MT9085C-	1310/1550 nm SM	46/46 dB	General-purpose model for installation and maintenance (I&M) Model for effective
053	1310/1550/1625 nm SM	46/46/44 dB	wavelength maintenance using macrobend analysis General-purpose model for
MT9085C-	1310/1550 nm SM 1310/1550	42/41 dB 42/41	installation and I&M Model with built-in filters for live circuit maintenance Model for
057	nm, 1650 nm SM	dB, 35 dB	FTTx/PON I&M Model for effective wavelength maintenance using macrobend
MT9085B-053	1310/1490/1550 nm SM	42/41/41 dB	analysis Model for FTTx/PON I&M; supports sectioned evaluation of CWDM
MT9085B-055	1310/1550/1625 nm SM	40/39/38 dB	wavelength band All-in-one model for SMF and MMF I&M
MT9085B-056	1310/1490/1550/1625 nm SM	42/41/41/40 dB	
MT9085B-057	1310/1550 nm SM	42/41 dB,	
MT9085B-058	850/1300 nm MM	29/28 dB	
MT9085A-053	1310/1550 nm SM	39/37.5 dB	General-purpose model for installation and I&M Model for effective
MT9085A-057	1310/1550/1625 nm SM	37/35.5/32.5 dB	wavelength maintenance using macrobend analysis All-in-one model for
MT9085A-063	1310/1550 nm SM	39/37.5 dB,	SMF and MMF I&M
	850/1300 nm MM	29/28 dB	

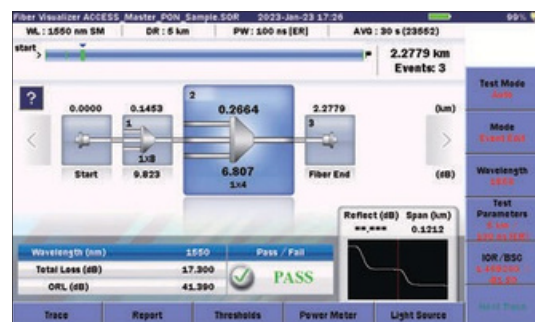

Basic Applications

Optical Power/Loss Measurement

Optical power and loss measurement is a key basic function for confirming the optical fiber installation condition and fault status. The OTDR measurement module functions as a light source outputting laser light. The optical power meter function built into a dedicated port option supports optical loss measurements (OLTS) using one tester.

MT9085 Series Optical Power Meter (Option) Product Line

These are specified as OTDR module options.

Option	Outline	Measurement
MT9085A/B/C-004	SMF Optical Power Meter SMF	Range +23 dBm
MT9085A/B/C-005	High Input Optical Power Meter	-43 to +30 dBm
MT9085A/B/C-007	SMF/MMF Optical Power Meter	-67 to +6 dBm



CMA5 Series: Light Source/Optical Power Meter The CMA5 series is an optical power meter and optical loss tester for optical power and loss measurements. For more details, see the separate catalog for the CMA5 series.




Visual Light Source

The visual light source is used when monitoring light leaking from the optical fiber core at fiber breaks.

MT9085 Series Visual Light Source (Option) Product Line

It is specified as an OTDR module option.

Option	Outline
MT9085A/B/C-002	Visual Fault Locator

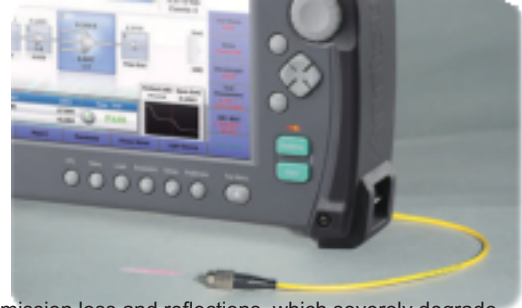

Optical Fiber End-face Inspection

Schramm dirt on the ferrule end face of connectors is a main cause of signal transmission loss and reflections, which severely degrade transmission

quality. Moreover, the optical fiber end face requires inspection and cleaning to assure accurate OTDR and optical power/loss measurements.

Using the MT9085 series in combination with the Video Inspection Probe G0306C external option (sold separately) supports end-face inspections.



Video Inspection Probe (External Attachment Option) Product Line

Option	Outline
G0306C	Video Inspection Probe

*: When checking the end face of some SC-APC-F and FC-APC-F adapters, sometimes, there may be a dark region at the screen edge as shown on the right and the end face may not be checked correctly.





The All-in-one MT9085 series Supports the Various Needs of Fiber I&M

By selecting each application from the top menu. Dedicated hard keys make it easy to move to relevant screens and return quickly to the top menu. Top-menu applications are structured using multiple menus starting with optical pulse tests (OTDR measurements).

* Application menu displays change according to installed options.



Top Menu Screen



First-Time User Easy-to-Understand Pass/Fail Evaluations Fiber Visualizer Function

On-site I&M work sometimes requires use of unfamiliar instruments, depending on the measurement environment. In addition, operation of complex measuring instruments cuts first-time users' work efficiency. The Fiber Visualizer simplifies the procedure from setting the measurement conditions to analyzing the measurement results. In addition, events such as the fiber far end, PON splitters, optical connectors, splices, etc., along the fiber are displayed as schematic icons along with the distance to each event and loss, helping resolve problems quickly.




Fiber Visualizer Screen



Manual Analysis

Realtime measurements as well as loss and reflectance and analysis of fiber connectors and splices in accordance with installation documentation working procedures are frequently performed manually using either the two-point or LSA method. While keeping the effective rotary knob manual operation of its predecessors, the MT9085 series also has new touch-screen operations for improved operability. The pressure-sensitive touchscreen even supports input without removing work gloves.

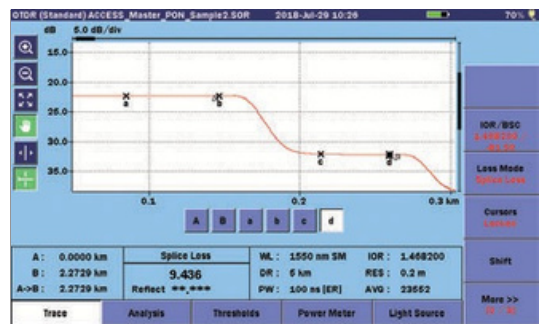


Connection Loss and Reflectance Analysis using Four Markers



Multiple Fiber Management: Installation Test Function

Efficient working practices are needed in environments requiring back-office management of both optical fiber cables with multiple Fibers, and multiple fibers. The Installation Test function improves work efficiency by presetting the number of fibers for measurement and the on-site measurement data to perform uninterrupted automatic measurement of multiple fibers.

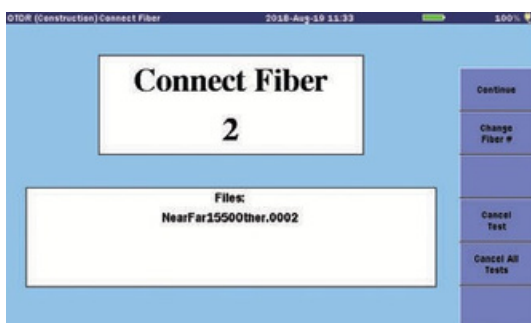


Installation Test Setting Screen



PON Network Analysis

The MT9085 series supports PON network measurements for up to 1 × 128 branches. The Fiber Visualizer function can preset information about splitter branches and threshold values to increase the analysis accuracy of event detection.

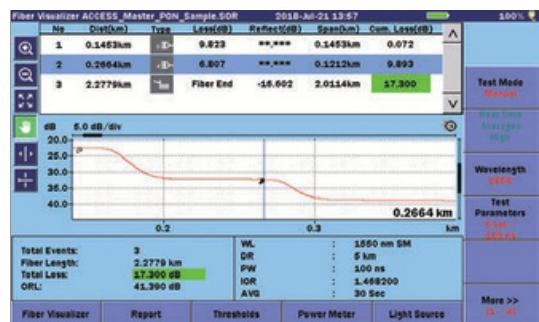


PON Measurement Analysis Screen

Basic Applications

OTDR

Realtime Measurement

The Realtime Measurement function is used when provisionally specifying the position of the fiber far end before starting averaging measurement, and when specifying the position of optical fiber bends. The MT9085 series not only keeps the high-quality realtime waveforms from predecessor ACCESS Master models but also has two high-speed and high S/N measurement modes that can be selected to match the usage environment. Additionally, the attenuation is adjusted automatically and the trace near the cursor is displayed at optimum quality.

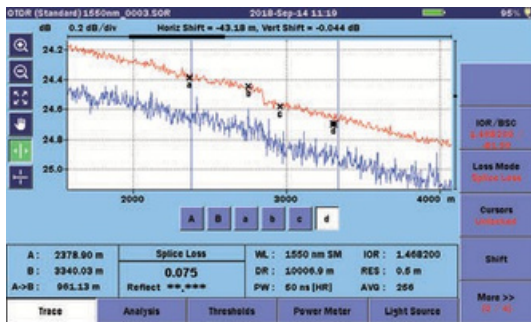


Realtime Measurement Screen

OTDR

Bi-directional Measurement Function

When connecting different types of optical fiber or mixtures of old and new fiber, sometimes it is impossible to measure loss accurately using one-way measurements. The Bi-directional waveform analysis function loads two data files measured for each direction respectively to perform accurate loss analysis using the average analysis values.

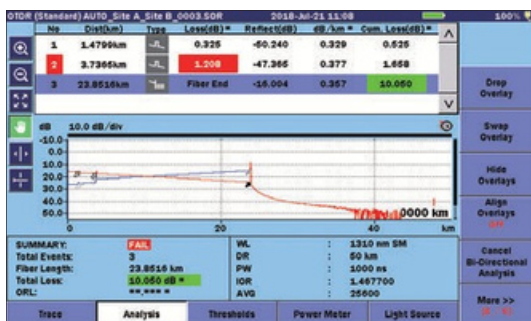

Bi-directional Analysis Screen

OTDR

Optical Communications Check

Function test optical signals from an OTDR into an in-service live optical fiber circuit risks damage to receivers at the opposite side of the communication system. The Optical Communications Check Function detects optical communications on the live circuit, stopping OTDR measurements causing problems on the live circuit.

OTDR

Connection Check

Function waveform data cannot be captured when the optical fiber connection condition at the OTDR output is bad, which prevents accurate data analysis and evaluation. This function checks the optical fiber connection condition to assure accurate measurement.

OTDR


Telcordia Format (SR-4731) Support

The MT9085 series supports the latest Telcordia format used commonly by OTDRs.

OTDR, OL TS, Visual Light Source

Simultaneous OTDR, Optical Power Meter and Visual Light Source Use


Sometimes installation work orders include multiple procedures such as optical power meter measurements, OTDR measurements, etc. In these cases, the MT9085 series improves work efficiency by supporting multiple measurements at one screen using the optical power meter and visual light source functions on the OTDR measurement screen.

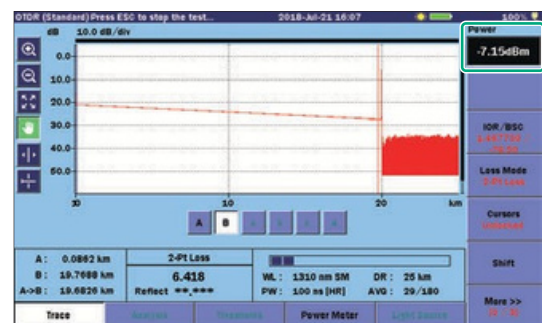

Optical Power Meter Values Displayed at Top-Right of Screen

OL-
TS**OLTS (Optical Loss/Power Measurement) Function**


A powermeter is built into the MT9085 series as standard equipment. The product line includes three optical power meter options, which can be selected according to support for SMF and MMF types and maximum measured level (+30 dBm).

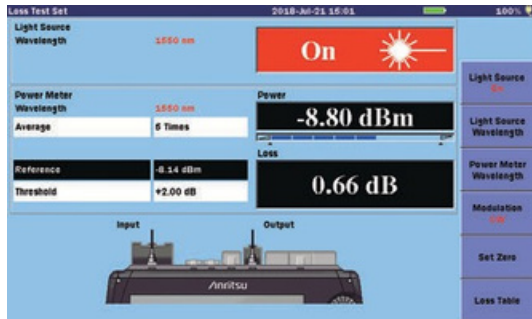

Optical Loss Measurement

OL-
TS**Measured Power, Loss Logs**


Repeat measured optical powermeter and optical loss data can be saved as log files that can be output in .csv format.

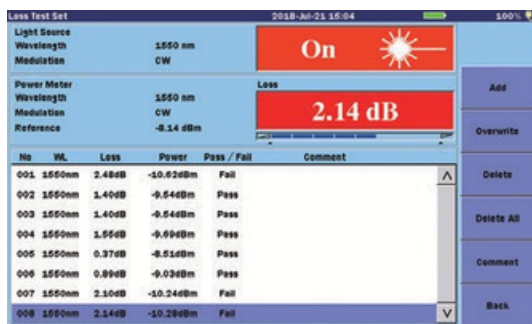

Logged Optical Power and Loss Output Screen

Fiber
Scop**IEC61300-3-35 Optical Fiber End-Face Inspection**

The condition of the fiber connector end face can be inspected using the MT9085 series in combination with the Fiberscope G0306C (VIP) for automatic Pass/Fail evaluation in accordance with the IEC61300-3-35 standard. Moreover, this Pass/Fail evaluation can also be performed using a PC and the G0306C.

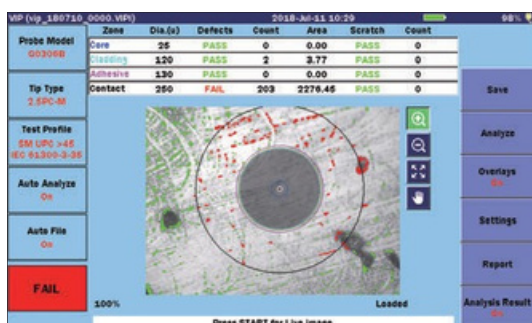

Fiberscope Measurement Screen

Fiber
Scop**Full Line of VIP**

This external VIP option comes with seven different tip types on the assumption that various different optical connector end faces will be inspected. Other tip options are available.

Scenario Manager Lite Function

This application executes predefined programs; it records test procedures and test parameters using remote commands in scenarios on the MT9085. Consequently, tests can be executed automatically without requiring a PC for remote control.

Command	Response	Result	Filename
INIT	0, 'No Error'	PASS	
*ESE 1	0, 'No Error'	PASS	
SOURCE:Wavelength 1310	0, 'No Error'	PASS	
INITiate	0, 'No Error'	PASS	
*OPC	0, 'No Error'	PASS	
*ESR?	1	PASS	
SENSE:TRACEReady?	1	PASS	
TRAC:LOAD:SOR?	0, 'No Error'	PASS	INIT_OPC1310.ser
INSTRUMENT:SELECT 1	0, 'No Error'	PASS	
INSTRUMENT:STATE 1	1	PASS	
*ESE?	0	PASS	
*ESR?	0	PASS	
*IDN?	ANRITSU, MT9085B-05	PASS	
*OPC?	1	PASS	
*SRE?	0	PASS	
*STB?	0	PASS	
*TSI?	0	PASS	
INSTRUMENT:SELECT 2			
INSTRUMENT:STATE 2			
SUN:ISM			
SOURCE:Wavelength 1550			

Scenario Manager Function

Cable Certification Test Function

The automatic Pass/Fail measurements of the Cable Certification Test function meet the IEC/ISO standards. Users create an all-in-one measurement project including the relevant standards, measured-fiber type, OTDR test items, VIP measurement conditions, etc., with the measurement test results managed in multiple fiber for report output as a pdf.

Field	Value
Project	ANRITSU2020
Operator	ANRITSU
Tests performed	0 / 40
OTDR	
Applicable Standards	ISO/IEC 11801-3:2017
Fiber Category	OS2
Cable ID	
Location A	ANRITSU
Location B	ATSUGI
Wavelength	1310 / 1550 nm
VIP	
Applicable Standards	IEC 61300-3-35 ed2.0
Test Profile	SM UPC >45
Probe Model	G0306B

Cable Certification Test Conditions Screen


Cable ID	OTDR VIP (A/B)	Result	Start Test
1	✓/✓/✓/✓/✓	Pass	
2	✓/✓/✓/✓/✓	Pass	
3	✓/✓/✓/✓/✓	Pass	
4	✓/✓/✓/✓/✓	Pass	
5	✓/✓/✓/✓/✓	Pass	
6	✓/✓/✓/✓/✓	Pass	
7	✓/✓/✓/✓/✓	Pass	
8	✓/✓/✓/✓/✓	Pass	
9	✓/✓/✓/✓/✓	Pass	
10	✓/✓/✓/✓/✓	Pass	

Cable Certification Test and Results Screen

Saving Data Files and Creating Reports

On-site measurement data captured using the MT9085 series can be saved in each original measurement application data file format as well as in various other formats, including PDF reports. Moreover, these data can be shared with a PC via interfaces such as WLAN, Bluetooth, USB Memory, etc., for further waveform analysis and reporting at the PC using dedicated software tools based on the on-site captured original data files.

* Communications over WLAN and Bluetooth require a USB dongle adapter. Files can also be shared via Ethernet, USB memory, and USB cable.

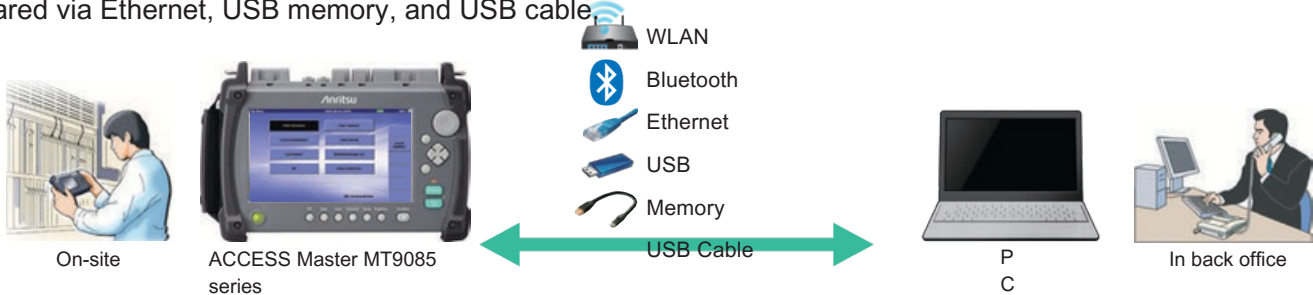

MT9085 Series Measured Data Save Methods

	Original Data	Screen Capture	.csv File	PDF Report Output
OTDR	Files	☑ ☑ ☑		☑
R	☑		☑	
OLTS	☑			☑

VIP


Windows PC Analysis Tools

	NETWORK
OTDR	S• Waveform analysis of original data file (.sor) saved by MT9085 • Report creation
VIP	Connector Master MX900030A • Analysis of loaded data file (.vipi) originally saved by MT9085 + G0306

C


Managing Measured Data

Each OTDR, OLTS, and VIP data set measured on-site using the MT9085 series can be saved as the original data file or as a .csv file. The screen capture function is useful when wanting to keep a simple record of the measured data. Saving is easy using the shortcut key at the bottom of the screen. At OTDR and VIP measurement, saving the file in the original data format (.sor, .vipi) is useful for further waveform data analysis back at the office either by reloading the data onto the MT9085 series or onto a PC. Moreover, in addition to creating a PDF report, reports combining the OTDR and VIP measurements results can also be created.

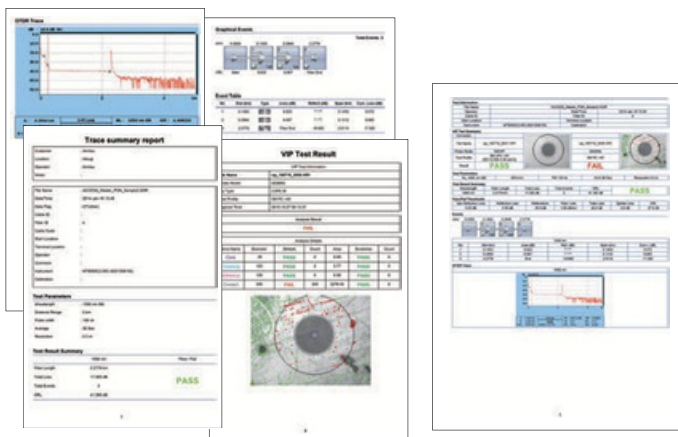

PDF Report Output

Waveform analysis and report creation for on-site OTDR measurement data results (.sor) on a PC can be performed using the dedicated Analysis Software NETWORKS (sold separately). Similarly, VIP measurement data can also be analyzed on a PC using the dedicated Connector Master MX900030A software.

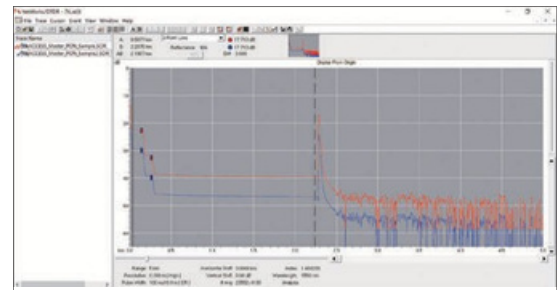

Waveform Analysis and Report Creation using NETWORKS

External Data File Transmission and Communications

In addition to transferring data files from the MT9085 series to a PC using either USB memory or a USB cable, data can also be transferred using WLAN and Bluetooth networks (requires external USB WLAN adapter). Communications over either WLAN or Ethernet interface can be controlled remotely using a Web browser GUI or remote commands. (Ethernet connection requires an external USB-Ethernet conversion cable.)



Remote GUI Control by Web Browser

Other Useful Functions and Performance

Common

Internal Memory


With large built-in memory of 1 GB for saving up to 50,000 waveforms, the MT9085 series presents no problems in saving large image data files and PDF files. At OTDR measurement, up to 50,000 waveforms can be saved in the original data file format (.sor).

USB Port Connection

The MT9085 series has three built-in USB2.0 Type A ports and a Micro-B type USB port. With these multiple port types, different ports can be allocated to individual functions, such as connection of a WLAN and Bluetooth dongle to one port each for data transfer, leaving other ports for connection of the fiberscope and USB mouse. In addition, data storage can be connected via a cable to the Micro-B USB port.

Password Protection

The MT9085 series has a built-in password protection function for requiring password input after starting the measuring instrument, which not only protects important internal data but also limits use of the instrument to registered users.

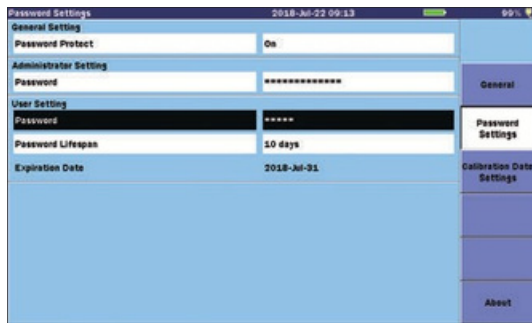

Password Protection Function

File Name Input Support

Saving measured data sometimes requires saving many pieces of relevant information, including date, wavelength, and measurement location in the file name. The MT9085 series makes it easy to manage file names using the built-in Matrix file name input function.



Matrix File Input Function

The latest firmware for the MT9085 series can be downloaded free-of-charge from the Anritsu website. In addition, the PC software (Connector Master MX900030A) for the G0306C can also be downloaded from the website.

* Contact our business section for version upgrades of OTDR PC software analysis (NETWORKS).

Panel Layout



* With Option 010
Protector fitted.

- 1** Three optical Power Meter options Visual Light Source,
- 2** shows light leaking from breaks in the optical fiber core, identifying fault locations, simultaneously use with OTDR
- 3** OTDR test port, supports various wavelengths matching application requirements
- 4** Three Type-A USB2.0 ports, connecting USB memory, and Bluetooth adapters for remote control using remote commands and remote web browser GUI using USB-Ethernet Adapter. Micro-B USB1.1 port for connecting internal memory to PC
- 5** Menus for selecting OTDR and LTS, VFL, VIP
etc
- 6** 8-inch wide Touch Screen, LCD-backlit color TFT, displays rms data etc., with good indoors and outdoors visibility
- 7** Compact, lightweight (1.9 kg) case (including battery, excluding protector)
- 8** Rotary knob for trace manipulation and setting
- 9** Arrow keys for trace manipulation and setting
- 10** Laser output indicator, red when laser on
- 11** Measurement Start button (real-time, ave)
- 12** Dedicated hard keys, top menu, file save/load, screen capture,
etc.

Specifications

ACCESS Master MT9085A/B/C Common

Specifications

Dimensions and Mass	Without Protector	Dimensions: 270 (W) × 165 (H) × 61 (D) mm, 10.6 × 6.5 × 2.4 inches Mass: 1.6 kg without battery, 1.9 kg including battery
	With Protector (option 010)	Dimensions: 284 (W) × 200 (H) × 77 (D) mm, 11.2 × 7.9 × 3 inches Mass: 2.6 kg
Display	8-inch touch screen TFT-Color LCD	
Interface	USB 2.0: Type A × 3 (memory), USB1.1: MicroB × 1 (USB mass storage)	
Wireless	WLAN/Bluetooth * via USB adapter connected to USB port	
Interface	Internal memory: 1 GB (up to 50,000 traces),	
Data Storage	External memory (USB): up to 32 GB	
Power	12 V(dc),	
Supply Battery	100 V(ac) to 240 V(ac), Allowable input voltage range: 90 V to 264 V, 50 Hz/60 Hz Type: Lithium ion Operating Time*1: 12 hours, Telcordia GR-196-CORE Issue 2, September 2010	
Power Consumption	Recharge Time: <5 hours (power off)	
Power Saving	20 W max (recharging), 4 W standard (low backlight, sweep stopped)	
Functions	Backlight off: Disable/1 to 99 minutes	
Vertical	Auto shutdown: Disable/1 to 99 minutes	
Scale	0.1, 0.2, 0.5, 1.0, 2.0, 5.0, 10.0 dB/div	
IOR Setting	1.300000 to 1.700000 (0.000001 steps)	
Units	km, m, kft, ft, mi	
Languages	User selectable (English, Simplified Chinese, Traditional Chinese, French, German, Italian, Korean, Portuguese, Russian, Spanish, Swedish and Japanese)	
Sampling Points*2	Up to 150,001	
Sampling Resolution	0.05 m to 60 m	
Reflectance Accuracy	Single mode: ±2 dB (When measuring the non-connected end of an approximately 25 km length fiber, Distance range: 50 km, Pulse width: 2 μs)	
Distance Accuracy	Multimode: ±4 dB (When measuring the non-connected end of an approximately 4.5 km length fiber, Distance range: 10 km, Pulse width: 100 ns)	
Loss Measurement Accuracy (Linearity)	±1 m ±3 × measurement distance × 10-5 ± marker resolution (excluding IOR uncertainty)	
Distance Range	±0.05 dB/dB or ±0.1 dB (whichever is greater) Single mode: 0.5, 1, 2.5, 5, 10, 25, 50, 100, 200, 300 km Multimode: 0.5, 1, 2.5, 5, 10, 25, 50, 100 km	
Testing Modes	Fiber Visualizer: Provides end/break location, end to end loss, fiber length, easy graphical summary, PDF report, Standard OTDR: User selectable automatic or manual set-up Construction OTDR: Automated, multi-wavelength testing	
Fiber Event Analysis	Light source: Stabilized Light source (CW, 270 Hz, 1 kHz, 2 kHz output) Loss test set (optional): Power meter and Light source Connectivity and inspection prevention (optional): 0.01 to 9.99 dB (0.01-dB resolution) Visual fault locator (optional): Visible red light for fiber identification and troubleshooting Reflectance: 70.0 to 20.0 dB (0.1 dB steps) Auto or manual operation, displayed in table format Fiber end/break: 1 to 99 dB (1-dB steps) Near end induced events up to 99 Macro bend detection	
OTDR Trace	Telcordia universal. SOR, issue 2 (SR-4731)	
Format	Real time sweep*3: 0.15 sec. Loss modes: 2-point loss, dB/km, 2-point LSA, splice loss, ORL Averaging modes: Timed (1 to 3600 s)	
Other Functions	Live Fiber detect: Verifies presence of communication light in optical fiber Connection check: Automatic check of OTDR to FUT connection quality Trace overlay and comparison, Template function, USB keyboard support, Remote control, Remote GUI Password protection feature	
Environmental Conditions	Operating temperature and humidity: -10°C to +50°C, <80% (non-condensing) Storage temperature and humidity: -20°C to +60°C, <80% (non-condensing) Vibration: Conforming to MIL-T-28800E Class 3 Ingress Protection Rating: IEC60529 IP51 Shock: MIL-T-28800E Style A (46 cm height, 8 corners, 6 faces; 14 drops in total, power off), Bump: IEC 60068-2-27, JIS C60068-2-27.	
CE	EMC	Shock-on-desk: MIL-T-28800E(45° angle or 100 mm lifted edge, 4 drops in total, power on)
	LVD	2014/30/EU, EN61326-1, EN61000-3-2
	RoH	2014/35/EU, EN61010-1
UKC	S	2011/65/EU, (EU) 2015/863, EN IEC 63000: 2018
	EMC	S.I. 2016 No.1091, EN 61326-1, EN61000-3-2
	LVD	S.I. 2016 No.1101, EN 61010-1
A		S.I. 2012 No.3032, EN IEC 63000:2018

*1: Typical, backlight Low, sweeping halted at 25°C

*2: Either high density value is selected depending on distance range

*3: Resolution: Low Density

OTDR

Specifications

Specifications							
MT9085							
Options	HR/ER Mode* 4	Wavelength* 5	Fiber Type	C Pulse width	Dynamic Range*6, 1	Dead Zone (Fresnel)*8 (IOR = 1.500000)	Dead (Backscatter)* (IOR = 1.500000)
MT9085C-053	☑	1310/1550 nm ±25 nm	Single Mode (SMF) 10/125 μm ITU-T G.652	3, 10, 20, 30, 50, 100, 200, 500, 1000, 2000, 4000, 10000, 20000 ns	46/46 dB*11	≤1 m, 0.8 m (typ.)	≤3.8/4.3 m
MT9085C-057	☑	1310/1550/1625 nm ±25 nm			25/25 dB*10 (Pulse width: 100 ns)		≤3.8/4.3/4.8 m
					46/46/44 dB*11 25/25/23 dB*10 (Pulse width: 100 ns)		
MT9085							
Options	HR/ER Mode* 4	Wavelength* 5	Fiber Type	B Pulse width	Dynamic Range*6, 1 3	Dead Zone (Fresnel)*8 (IOR = 1.500000)	Dead (Backscatter)* (IOR = 1.500000)
MT9085B-053	☑	1310/1550 nm ±25 nm	Single Mode (SMF) 10/125 μm ITU-T G.652	3, 10, 20, 30, 50, 100, 200, 500, 1000, 2000, 4000, 10000, 20000 ns	42/41 dB*11	≤1 m 0.8 m (typ.)	≤5/5/5 m
MT9085B-055	☑	1310/1550 nm ±25 nm, 1645 nm to 1655 nm			42/41/35 dB*11		≤5/5.5/6.5 m
MT9085B-056	☑	1310/1490/1550 nm ±25 nm			42/41/41 dB*11		≤6/6.5/6.5 m
MT9085B-057	☑	1310/1550/1625 nm ±25 nm			dB*11		≤6/6.5/7.5 m
MT9085B-058	☑	1310/1490/1550/1625 nm ±25 nm			42/41/38/40 dB*1 1		≤7/7.5/7.5/8.5 m
MT9085B-063	☑	1310/1550 nm ±25 nm, 850/1300 nm ±30 nm	HYBRID (SMF/MMF)*1 2	SMF: above MMF: 3, 10, 20, 30, 50, 100, 200, 500, 1000, 2000, 4000 ns 850 nm: Does not support 1000, 2000, 4000	dB*11 42/41 dB*11 29/28 dB*1 1		≤5/5.5 m, ≤4/5 m (3/4 m typ.)
MT9085A							
Options	HR/ER Mode* 4	Wavelength* 5	Fiber Type	A Pulse width	Dynamic Range*6, 7	Dead Zone (Fresnel)*8 (IOR = 1.500000)	Dead (Backscatter)* (IOR = 1.500000)
MT9085A-053	☑	1310/1550 nm ±25 nm	Single Mode (SMF) 10/125 μm ITU-T G.652	3, 10, 20, 30, 50, 100, 200, 500, 1000, 2000, 4000, 10000, 20000 ns	39/37.5 dB*11	≤1 m	≤5/5.5 m
MT9085A-057	☑	1310/1550/1625 nm ±25 nm			37/35.5/32.5 dB*11		≤6/6.5/7.5 m
MT9085A-063	☑	1310/1550 nm ±25 nm, 850/1300 nm ±30 nm	HYBRID (SMF/MMF)*1 2	MMF: 3, 10, 20, 30, 50, 100, 200, 500, 1000, 2000, 4000 ns 850 nm: Does not support 1000, 2000, 4000	39/37.5 dB*1 1 29/28 dB*	0.8 m (typ.)	≤5/5.5 m, ≤4/5 m (3/4 m typ.)

Laser	IEC 60825-1: 2014 CLASS 1 Complies with 21CFR1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed.3., as described in Laser Notice No. 56, dated May 8, 2014
-------	---

*4: HR: High Resolution mode for Short dead zone.


* ER: Enhanced Range mode for PON

*5: 25 μs Pulse width: 1 μs (all except 850 nm, 1300 nm), 850 nm/1300 nm: 100 ns

*6: Pulse width range: 20 μs to 100 ns (Options 053, 055, 056, 057, 058, 063, 1310 nm/1550 nm)
Pulse width: 4 μs (Option 063, 1300 nm) at Distance range: 25 km
Pulse width: 500 ns (Option 063, 850 nm) at Distance range: 25 km
Averaging: 180 sec., SNR = 1, 25°C


*7: Dynamic range (one-way back-scattered light)

SNR = 1: The level difference between the Fresnel level and the level where near end back-scattering occurs.

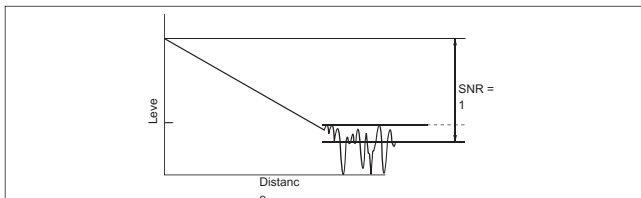

*8: Pulse width: 3 ns (Options 053, 055, 056, 057, 058, 063). Refer to the figure

*9: Pulse width: 10 ns, return loss 55 dB, Deviation ±0.5 dB, 25°C
Pulse width 3 ns, return loss 40 dB, Deviation ±0.5 dB, 25°C
(Option 063, 850 nm/1300 nm)

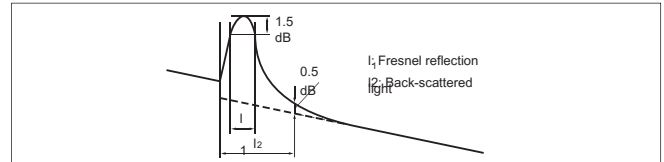

*10: Pulse width: 100 ns (ER Mode), Distance range: 100

*km Averaging: 180 sec., SNR = 1,

*11: Typical. Subtract 1 dB for guarantee 12: At measurement of 50 μm/125 μm MM Fiber, the dynamic range drops by

* about 3.0 dB

13: At 1650 nm: With background light, 1310/1550 nm, -19 dBm CW light

14: Safety measures for laser products

The following descriptive labels are affixed to the product.



Specifications

Light Source Specifications – Standard on all models* ₅	
Stabilized Light Source (through OTDR port)	
Wavelength* ₁	Same as OTDR ≤5 nm (1310 nm)
Spectral Width* ₁ ₇	≤10 nm (850/1300/1490/1550/1625 nm) ≤3 nm (1650 nm) 850/1300/1310/1490/1550/1625 nm: ±30 nm
Wavelength Accuracy* ₇	1650 nm: ±5 nm Same as OTDR
Fiber Type	Same as OTDR
Optical Connector	–5 ±1.5 dBm
Output Power* ₁₇	≤0.1 dB
Output Stability* ₁₈	CW, 270 Hz, 1 kHz, 2 kHz
Modes of	Same as OTDR
Operation* ₁₉	

Laser Safety

Power Meter Specifications – Standard on all models* ₁₅	
Standard Integrated Power Meter* ₁₆ (through OTDR port)	
Maximum Input	+10 dBm –50 to –5 dBm Same as OTDR Same as
Measurement	OTDR ±6.5% 1310, 1550, 1625, 1650 nm (Options 053,
Range Fiber Type	055, 057, 063)
Optical Connector	1310, 1490, 1550, 1625 nm (Options 056, 058)
Accuracy* ₂₀	Store reference, loss table
Setting Wavelengths	
Features	

Loss Test Set Specifications – Optional on all Models* ₁₇ , * ₁₈ Power meters (004, 005 and 007)			
Option Fiber Type	MT9085A/B/C-007	MT9085A/B/C-004	MT9085A/B/C-005
Measurement Range*	Single Mode: 10 µm/125 µm (G.652), Multimode: 62.5 µm/125 µm	Single Mode: 10 µm/125 µm (G.652) *PC only for UPC connector	Single Mode: 10 µm/125 µm (G.652)
² ₁	–67 to +6 dBm* ₂₂ (CW, 1310 nm)	–50 to +23 dBm (CW, 1550 nm)	–43 to +30 dBm (CW, 1550 nm)
Wavelength Range	800 nm to 1700 nm	1200 nm to 1700 nm	
Setting Wavelengths	850, 1300, 1310, 1383, 1490, 1550, 1625, 1650 nm	1310, 1383, 1490, 1550, 1625, 1650 nm	
Optical Connector	Universal – uses LP-XX adapters	adapters (same as OTDR) ±5% (1310 nm/1550 nm)* ₂₄	Universal – uses MA9005B adapters
Accuracy	±5% (1310 nm/1550 nm)* ₂₃ , ±0.5 dB (850 nm)	≥36 dB* ₂₅	
Reflectance	nm)* ₂₃		—
Modulation	CW, 270 Hz, 1 kHz, 2 kHz		
Features	Save reference, loss table		
Environmental	Operating temperature and humidity: 0°C to +50°C, <80% (non-condensing)		

Visual light Source (Option 002)	
Central Wavelength	650 nm±15 nm (at 25°C) 0 ±3 dBm (CW) 10 µm/125 µm, SMF (ITU-T G.652) 2.5 mm universal
Optical Output	IEC 60825-1: 2014 CLASS 3R:
Output Optical Fiber	Complies with 21CFR1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed.3.. as described in Laser Notice No. 56, dated May 8, 2014
Optical Connector	
Laser Safety* ₂₆	Operating temperature and humidity: 0°C to +50°C, <80% (non-condensing)
Environmental	

*₁₅: Some models do not support power meter (See next page)

*₁₆: If Option 004, 005 or 007 is ordered, the standard integrated power meter is not available

*₁₇: CW, 25°C

*₁₈: CW: –10°C to 50°C (±1°C) difference between max/min. values over 1 minute, SM fiber 2 m

*₁₉: Modulation +1.5% with 10 minute warm up

*₂₀: CW input –20 dBm at 1550 nm, 23°C ±2, Using Anritsu's reference single mode fiber with FC/UPC connector

*₂₁: Peak power, subtract 3 dB for modulated tones

*₂₂: –60 to +3 dBm (Option 007 @850 nm)

*₂₃: CW, at –10 dBm (1310/1550 nm), At –10 dBm (850 nm), 25°C, Using Anritsu's reference single mode fiber with FC/UPC connector. After zero offset

*₂₄: CW, at 0 dBm (1310/1550 nm), 25°C, Using Anritsu's reference single mode fiber with FC/UPC connector. After zero offset

*₂₅: Using SM fiber (ITU-T G.652). Reflectance: ≥45 dB

*₂₆: Safety measures for laser products



Specification

S

Standard Light Source and Power Meter Built-in

LS: MT9085A/B/C standard built-in stabilized Light Source,
OPM: MT9085A/B/C standard built-in Optical Power Meter

Options	Optical Port	L	OP
MT9085A/B/C-053	1310/1550 nm SM 1310/1550	S	M
MT9085B-	nm SM 1650 nm SM	☒	☒☒☒
	1310/1490/1550 nm SM	☒	☒☒☒
MT9085B-056	1310/1550/1625 nm SM	☒	
MT9085A/B/C-057	1310/1490/1550/1625 nm SM	☒	
MT9085B-058	850/1300 nm MM 1310/1550	☒	
MT9085A/B-063	nm SM	☒	—
		☒	☒

Battery Pack: Z0921A*

Battery Voltage,	Lithium Ion secondary battery 11.1 V,
Capacity Dimensions	4200 mAh 53 (W) × 19 (H) × 215 (D) mm,
and Mass	330 g (typ.) Charging: +5°C to +30°C,
Environmental Conditions	≤80% RH
	Discharging: -20°C to +60°C, ≤80% RH
	Storage: -20°C to +50°C, ≤80% RH

*: Z0921A must not be

exported to China.

Rated AC Input	100 V(ac) to 240 V(ac), 50 Hz/60 Hz 12
AC Adapter: Z1625A	
Rated DC Output	V(dc), 5 A Operating: 0°C to +45°C, 20
Environmental Conditions	to 80% RH Storage: -20°C to +70°C,
	10 to 90% RH

Please specify the model/order number, name and quantity when ordering.
The names listed in the chart below are Order Names. The actual name of the item may differ from the Order Name.

1) Specify at least one main unit.

Model/Order No.	Name
Main Unit	
MT9085C-053	ACCESS Master High Performance Dynamic Range
MT9085B-053	ACCESS Master Enhanced Dynamic Range
MT9085B-056	ACCESS Master Standard Dynamic Range
Standard Accessories	
MT9085-001	Operation Manual (CD): 1 pc
MT9085-002	Quick Guide: 1 pc
MT9085-003	Power cord: 1 pc
MT9085-004	Line cord: 1 pc
MT9085-005	Front Pack: 1 pc

2) Specify at least one module option (wavelength).

Model/Order No.	Name
	Module Option (OTDR)*4
MT9085C-053	High Performance Model SMF 1.31/1.55 µm OTDR SMF 1.31/1.55/1.625 µm OTDR
MT9085B-053	Enhanced Model SMF 1.31/1.55 µm OTDR SMF 1.31/1.55/1.65 µm OTDR SMF 1.31/1.49/1.55 µm OTDR SMF 1.31/1.55/1.625 µm OTDR SMF 1.31/1.49/1.55/1.625 µm OTDR MMF 0.85/1.3 µm & SMF 1.31/1.55 µm
MT9085B-056	Standard Model SMF 1.31/1.55 µm OTDR SMF 1.31/1.55/1.625 µm OTDR
MT9085A-053	OTDR
MT9085A-057	OTDR
MT9085A-063	OTDR
MT9085B-063	OTDR

3) Specify at least one optical connector.

Model/Order No.*5	Name
	Option (Connector)
MT9085x-025*6	FC-APC Connector Key width 2.0 mm
MT9085x-026*6	SC-APC Connector
MT9085x-037*4	FC Connector ST Connector SC Connector

4) Choose from the following options.

Model/Order No.*5	Name
MT9085x-040*4	Option (Visual light Source) Visual Fault Locator
MT9085x-002	
	Option (Power Meter)*7
MT9085x-004	SMF Optical Power Meter
MT9085x-005	SMF High Power Optical Power Meter
MT9085x-007	SMF/MMF Optical Power Meter
	Option (Others)
MT9085x-010*8	Protector

- *1: Stores operation manual and quick guide
- *2: Power cord (J0979) supplied at separate purchase
- *3: Z0921A must not be exported to China.
- *4: Cannot only connect APC-type optical fiber
- *5: Specify A, B, or C at "x"
- *6: Can only connect APC-type optical fiber
- *7: Same optical connector or connector adapter supplied as type specified for optical pulse tester
- *8: Front Protector B0584A cover supplied with belt as standard

Example of Ordering Configuration

- 1) MT9085B ACCESS Master Enhanced Dynamic Range
- 2) MT9085B-053 SMF 1.31/1.55 µm OTDR
- 3) MT9085B-040 SC Connector
- 4) MT9085B-002 Visual Fault Locator
- 4) MT9085B-007 SMF/MMF Optical Power Meter
- 4) MT9085B-010 Protector

- Requires one each for items 1) to 3)
- When specifying Model B, select from B-type options for items 2) to 4).
- 3) When specifying SC connector at 3), SC connector will be used at power meter in item 4).



With Protector (Option) (The Protector Cover B0584A is supplied with a carrying strap as standard.)



Without Protector

Ordering Information

5) Choose from the following when specifying application parts, peripherals, consumables, etc.*1

Model/Order No.	Name	Description
	Application Parts	
W3971AE	MT9085 Series Operation Manual	Printed. Electronic version included on accessory CD Z1991A.
W3972AE	MT9085 Series SCPI Remote Control Operation Manual	Printed. Electronic version included on accessory CD Z1991A. With shoulder strap. Can also accommodate main unit with fitted Option 010 Protector
B0745A	Softcase	Dimensions 420 (W) × 330 (H) × 148(D) mm Option 010 Protector cover only
B0582A	Soft carrying case	Li-ion Secondary battery, 11.1 V(dc), 4200 mAh
B0583A	Hard transit case	Li-ion battery charger For OTDR port, For option power meter port (MT9085A/B/C)
B0549	HARD CARRYING CASE	For OTDR port, For option power meter port (MT9085A/B/C)
B0584A	Front cover	For OTDR port, For option power meter port (MT9085A/B/C)
Z0921A*2	Battery Pack	For OTDR port, For option power meter port (MT9085A/B/C)
Z1632A*2	Battery Charger	For OTDR port (MT9085A/B/C)
J1295	CAR PLUG CORD	For OTDR port (MT9085A/B/C)
J0617B	Replaceable optical connector (FC-PC)	FC-FC connector (JJ adapter)
J0618D	Replaceable optical connector (ST)	Ferrule connection adapter 2.5 mm → 1.25 mm for visual light source (Option 002 only)
J0618F	Replaceable optical connector (HMS-10/A)	For option power meter port (MT9085A/B/C-005)
J0619B	Replaceable optical connector (SC-PC)	For option power meter port (MT9085A/B/C-005)
J0739A	Replaceable optical connector (FC-APC)	For option power meter port (MT9085A/B/C-005)
J1697A	Replaceable optical connector (SC-APC)	For option power meter port (MT9085A/B/C-007)
J0057	OPTICAL ADAPTER FC TYPE	For option power meter port (MT9085A/B/C-007)
J1335A	MU/LC connector adapter	For option power meter port (MT9085A/B/C-007)
MA9005B-37	FOR FC CONNECTOR	Converts main unit SC/UPC connector to SC/APC
MA9005B-38	FOR ST CONNECTOR	Converts main unit SC/APC connector to SC/UPC
MA9005B-40	FOR SC CONNECTOR	Converts main unit FC/UPC connector to FC/APC
LP-FC	FC-PC POWER METER ADAPTER	Converts main unit FC/APC connector to FC/UPC
LP-ST	ST-PC POWER METER ADAPTER	Converts main unit SC connector to LC (SMF only)
LP-SC	SC-PC POWER METER ADAPTER	Converts main unit SC connector to LC (MMF 62.5/125 μm only)
J1530A	SC PLUG IN CONVERTER (UPC(P)-APC(J))	1 pc
J1531A	SC PLUG IN CONVERTER (APC(P)-UPC(J))	6 pcs for Z0914A
J1532A	FC PLUG IN CONVERTER (UPC(P)-APC(J))	Stick type (200 pcs/set)
J1533A	FC PLUG IN CONVERTER (APC(P)-UPC(J))	X400 magnification fixed. Displays fiber end-face condition on ACCESS Master screen and performs Pass/Fail evaluation
J1534A	LC-SC Plug-in Converter (for SM, SC(P)-LC(J))	Also supports end-face evaluation on PC running MX900030A software downloaded from Anritsu web site.
J1535A	LC-SC Plug-in Converter (for MM, SC(P)-LC(J))	For remote GUI connection
Z0914A	Ferrule cleaner	
Z0915A	Replacement reel for ferrule cleaner	
Z0284	Adapter Cleaner	
G0306C*3	Video Inspection Probe	
J1480	USB-Ethernet	
A NETWORKS*4	converter PC Software NETWORKS	Microsoft Windows 10 (32 bit, 64 bit), Windows 8/8.1 (32 bit, 64 bit), Windows 7 (32 bit), Windows XP SP3 (currently Ver. 5.00 at November 2022)

*1: Optional Accessories cannot be repaired

*2: This product must not be exported to China.

*3: When checking the end face of some SC-APC-F and FC-APC-F adapters, sometimes, there may be a dark region at the screen edge and the end face may not be checked correctly.

4: Reduce the software display resolution to 1920 × 1080 or less.



Softcase
(B0745A)



Soft Carrying Case
(B0582A)



Hard Carrying Case (B0583A)-Attache
style



Hard Carrying Case
(B0549)



J1530A to J1535A Plug-in
Converter (The photo shows
the J1534A)



MU/LC Connector Adapter
(J1335A)



Battery Pack
(Z0921A)



CAR PLUG
CORD (J1295)



Video Inspection Probe (× 400)
(G0306C)

Network Master Pro MT1000A



OTDR Module	1310/1550 nm SMF	OTDR Module	MU100020A
1310/1550/850/1300 nm	SMF/MMF	OTDR Module	MU100021A
1310/1550/1625 nm	SMF	OTDR Module	MU100022A
1310/1550/1650 nm	SMF		MU100023A

Installing an OTDR Module MU100020A/MU100021A/MU100022A/MU100023A provides the OTDR functions required for optical fiber I&M. Work efficiency is increased by all-in-one support for optical fiber tests and data communications network commissioning.

I&M tests of 1.5 Mbps to 100 Gbps communications networks can be executed by simultaneously installing the MU100010A or MU100011A. In addition to supporting Ethernet, OTN, etc., networks, Mobile base station CPRI and OBSAI, as well as

SyncE protocols are also supported.

10G Multirate Module


MU100010A

100G Multirate Module


MU100011A

Installing the MU100010A or MU100011A in the MT1000A supports commissioning and

maintenance tests of communications networks operating at speeds from 10 Mbps to 100 Gbps. In addition to Ethernet, OTN, eCPRI/RoE/CPRI/OBSAI, Fibre Channel and SyncE protocols used by mobile network base stations are supported too.



MU100020A/MU100021A/MU100022A/
MU100023
A



MU100010A/MU100011
A

MT9090 Series



μOTDR Module

MU909014/15

Compact OTDR for full automatic verification of optical networks, FTTH-PON, Metro and Core..

Gigabit Ethernet Module

MU909060A

Dedicated field test solution for installation and troubleshooting Ethernet links in access networks.



MU909014/1
5



MU909060
A

Light Source/Optical Power Meter CMA5 Series

For optical fiber installation and maintenance.



Network Master Pro MT1040A

The Network Master Pro MT1040A for 400G networks is a portable tester for evaluating the communications quality of various network types operating at speeds from 10 Mbps to 400 Gbps. The stackable module configuration facilitates dual-port 400G Ethernet measurements using two installed 400G measurement modules.

- All-in-one, multiport network evaluation
- OTDR configuration by re-arranging stackable module configuration
- Efficient on-site automated testing and remote control

