

Power

1400 SERIES OPTICAL POWER METER


SPECIFICATION SHEET

AVAILABLE IN PXI

AVAILABLE IN MTRIQ


Quantifi Photonics' Power 1400 Series optical power meter provides fast monitoring of signal power from -60 to +10 dBm and broad wavelength range of 750 to 1700 nm.

With a logarithmic amplifier, it avoids gain-jumps faced by multi-stage linear amplifier power meters.



Data Logging Capability

Data logging of up to 1024 samples is available on 2 channels, so you can capture transient events with ease.



Single logarithmic amplifier

Use of a logarithmic amplifier eliminates the gain jumps exhibited by power meters with multi-stage linear amplifiers. Get consistent and reliable measurement at all power levels.



Simple, intuitive operation with COHESIONUI

Control the Power module from your PC or mobile device. Plus, large format view mode makes it easy to monitor your instrument even when working away from your desk.



Seamless PXI integration

Take advantage of PXI's integrated triggering and synchronization capabilities across electrical and optical instruments.



2 or 4 power meters in a single instrument

Achieve high channel density with up to 68 channels in an 18-slot PXI chassis or 4 channels in an ultra-compact benchtop instrument.


- Fiber optic manufacturing test.
- Power measurement integration for automated test systems.
- Fiber optic laser test and characterization.
- General and versatile R&D and production tool.

Integrated hardware triggering

PXI's integrated timing and hardware triggering capabilities allow the user to synchronize a variety of instruments through the trigger bus and system reference clock features of the PXI platform. This offers a number of advantages over more traditional software-initiated measurements.

- True parallel measurements of multiple devices under test allows you to scale your manufacturing and decrease the test time per DUT.
- Extremely low latency allows you to capture fast events or measure your DUTs very quickly.
- Precise timing alignment between optical and electrical modules gives you control of trigger events to occur exactly when required.

Each slot can create a trigger and the trigger event can be transferred through each PXI Trigger line. Configuring the trigger line can be done easily through NI max software interface for the PXIe mainframe.

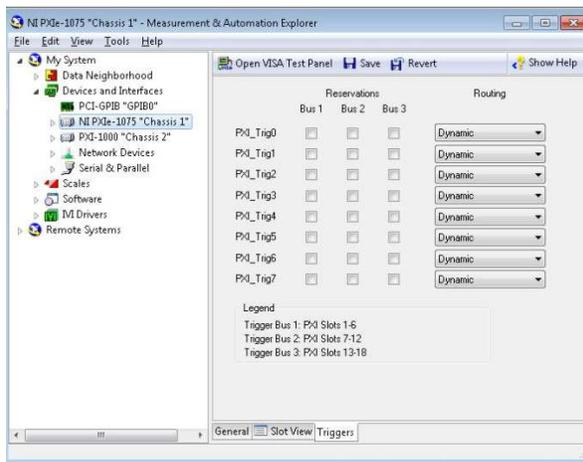

CHOOSE YOUR FORM FACTOR

PXIe – MODULAR

Our expanding range of PXIe optical test solutions are used by customers in mixed-signal test and measurement systems, reducing complexity, lowering the cost of test and accelerating time to market.

- Multi vendor, open standard with over 2500 PXI modules available
- Advanced timing and synchronization capabilities across instruments
- Low latency, high performance processing and fast data throughput
- Design and build scalable, high channel count systems
- Small footprint and lower power consumption



MATRIQ – COMPACT & PORTABLE

The MATRIQ series provides the same high-performance test capabilities of our PXIe modules in an compact benchtop design. MATRIQ instruments are simple to setup and easy to operate, making them the perfect choice for your optical lab or test bench.

- Same performance and control as our PXIe modules
- Plug and play with USB or Ethernet connectivity
- Control via the web-based GUI, COHESIONUI or SCPI commands
- Compact and portable design saves benchtop space




POWER 1400 SERIES TECHNICAL SPECIFICATIONS

PXI - MODULAR



POWER-1405-2-MP-PXIE



POWER-1401-4-FC-PXIE

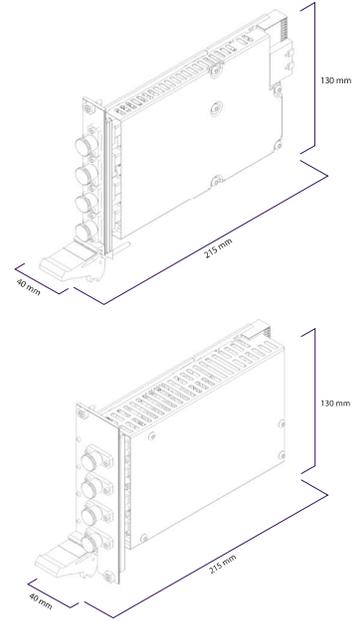

MATRIQ - COMPACT & PORTABLE



POWER-1401-4-FC-MTRQ

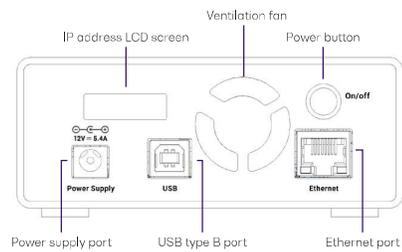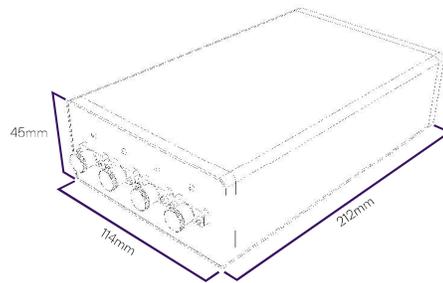

POWER 1400 SERIES TECHNICAL SPECIFICATIONS

General Specifications	PXI	MATRIQ
Bus connection	PXle	USB and Ethernet
Slot count	1 slot: 1401 2 slots: 1405	-
Dimensions (HxWxD)	1 slot: 130 x 20 x 215 mm 5.1 x 0.8 x 8.5 inches 2 slot: 130 x 40 x 215 mm 5.1 x 1.6 x 8.5 inches	53 x 120 x 202 mm 2.1 x 4.7 x 8.0 inches
Weight	~ 1 kg ~2.2 lbs	~ 1.1 kg ~ 2.4 lbs
Operating temperature range	5 °C to 45 °C 41 °F to 113 °F	5 °C to 45 °C 41 °F to 113 °F
Storage temperature range	-40 °C to 70 °C -40 °F to 158 °F	-40 °C to 70 °C -40 °F to 158 °F

Power Specifications	PXI	MATRIQ
AC input voltage range	Please refer to the latest PXI Express Hardware Specifications published by the PXI Systems Alliance.	90 to 264 VAC
AC input current		1.3A (115Vac), 0.9A (230Vac)
AC frequency range		47 to 63 Hz
DC output voltage		12V
DC output current max		5.41A
Dimensions (LxWxH)		4.58 x 2.06 x 1.23" (116.3 x 52.4 x 31.3 mm)

Model Number	1401	1401
Number of channels	2 or 4	2 or 4
Optical connectors	FC/APC, FC/PC, SC/PC, SC/APC	FC/APC, FC/PC, SC/PC, SC/APC
Sensor	InGaAs wide area detector	InGaAs wide area detector
Wavelength range	750 nm to 1700 nm	750 nm to 1700 nm
Power	- 60 dBm to +10 dBm	-60 dBm to +10 dBm
Damage level	+ 12 dBm	+12 dBm
Uncertainty ^{2,3,5}	± 0.29 dB (Typical) ± 0.50 dB (Max)	± 0.29 dB (Typical) ± 0.50 dB (Max)
Linearity ^{2,5}	± 0.1 dB, - 40 dBm to 0 dBm; ± 0.2 dB, -50 dBm to - 40 dBm	± 0.1 dB, - 40 dBm to 0 dBm; ± 0.2 dB, -50 dBm to - 40 dBm
Return loss ⁶	> 45 dB	> 45 dB
Averaging time	10 ms to 10 s	10 ms to 10 s
Data logging capability	1 to 1024 samples per channel on channel 1 and 2. 1 sample per channel on channels 3 and 4.	1 to 1024 samples per channel on channel 1 and 2. 1 sample per channel on channels 3 and 4.
External trigger	Yes	No

POWER 1400 SERIES TECHNICAL SPECIFICATIONS

Digital Power Meter	1401	1401
Calibration wavelengths	850, 1310, 1490, 1550	850, 1310, 1490, 1550
Linearity ^{2,5}	± 0.1 dB: -40dBm to 0dBm, ± 0.20 dB: -50 dBm to -40 dBm	± 0.1 dB: -40dBm to 0dBm; ± 0.20 dB: -50 dBm to -40 dBm
Total uncertainty ^{2,3,5}	± 0.29 dB (Typical) ± 0.50 dB (Max)	± 0.29 dB (Typical) ± 0.50 dB (Max)
Averaging time	100 µs to 10 s	100 µs to 10 s
Resolution	0.01 dB	0.01 dB
3 dB frequency response	5 kHz	5 kHz
Data logging capability	1 to 1024 points per channel	1 to 1024 points per channel
Sample rate for trace	0.01 Hz to 12 KHz	0.01 Hz to 12 KHz
PXle trigger capability	Yes	No

Model Number	1405	1405
Number of channels	2	2
Optical connectors	MPO	MPO
Sensor	InGaAs wide area detector	InGaAs wide area detector
Wavelength range	800 nm to 1700 nm	800 nm to 1700 nm
Power	- 45 dBm to + 12 dBm	- 45 dBm to + 12 dBm
Damage level	+ 18 dBm	+ 18 dBm
Uncertainty ^{2,3,5}	± 0.29 dB (Typical) ± 0.50 dB (Max)	± 0.29 dB (Typical) ± 0.50 dB (Max)
Linearity ^{2,5}	± 0.1dB - 40 to 10 dBm; ±0.2dB - 50 to - 40 dBm	± 0.1dB - 40 to 10 dBm; ±0.2dB - 50 to - 40 dBm
Return loss ⁶	TBD	TBD
Averaging time	10 ms to 10 s	10 ms to 10 s
Data logging capability	1 to 1024 samples per channel on channel 1 and 2.	1 to 1024 samples per channel on channel 1 and 2.
External trigger	Yes	No


Notes

1. Specifications are valid at 23 °C ± 3 °C.
2. +10 dBm to -40 dBm, 23 °C.
3. Excluding connectors.
4. < 10 dB attenuation.

5. At calibration wavelengths.

6. Wavelength 1550 nm ± 30 nm, standard single-mode fiber, angled connector 8°, T=23 °C ± 5 °C.

ORDERING INFORMATION

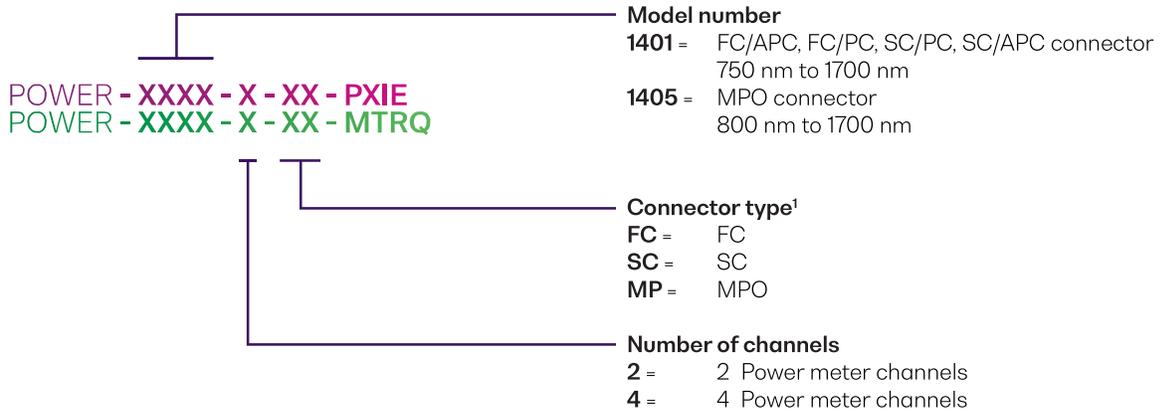

Notes

1. Because it is a free-space launch into a large area detector that captures all the light, the FC connector is compatible with FC/APC type inputs and the SC is compatible with SC/APC inputs.

WARRANTY INFORMATION

This product comes with a standard 1 year warranty.

EXTENDED WARRANTIES AND CALIBRATION PLANS

With an Extended Warranty and Calibration Plan you can spend more time focused on your priorities and less time worrying about maintenance.

Over time and with regular use, all optical parts and connectors require re-calibration and maintenance to guarantee accurate and reliable performance.

Add a 3 or 5 year Extended Warranty at the time of purchase.

Guarantee peak performance

Ensure your equipment is operating at its best for reliable and accurate results.

Lower cost of ownership

Lock in savings and maximise your budget with a lower cost of ownership.

Peace of mind

Spend less time worrying about maintenance and more on generating results.

CALIBRATION PLANS FOR ADDITIONAL DISCOUNTS

Order a Calibration Plan when you purchase your Quantifi Photonics' test instruments and qualify for additional discounts.

10% Discount

On calibrations ordered at the time of purchase.

25% Discount

Add on an extended warranty and receive a 25% discount on calibrations.

With an instrument calibration performed by Quantifi Photonics technicians you receive.

- Comprehensive calibration to factory specifications.
- End-to-end inspection to ensure all instrument functions are working and connectors are clean.
- Firmware, software and documentation updates.
- Certificate of Calibration which includes detailed test results.

We recommend Quantifi Photonics optical instruments are re-calibrated every 12 months.

How to purchase

Contact your Quantifi Photonics sales representative about our Extended Warranty or Calibration Plans or email sales@quantifiphotonics.com.

Extended Warranties and Calibration Plans must be ordered at the time of purchase and are available only for Quantifi Photonics' products. The 25% calibration discount only applies to calibrations while the product is covered by the Extended Warranty period.

Our portfolio of optical and electrical test modules is rapidly expanding to meet a wide range of customer requirements and applications.

Tunable Laser Sources

Versatile telecom laser sources with full tunability across C or L bands. Narrow 100 kHz linewidth, up to 16.5 dBm of power, optional whisper mode to disable frequency dither.

Erbium-Doped Fiber Amplifier (EDFA)

High power Erbium-Doped Fiber Amplifier for signal power amplification in C and L bands with various control modes, including automatic gain control.

Fixed Wavelength Laser Sources

Highly customizable DFB or FP laser sources available in a wide range of wavelengths and powers. Models support SMF, MMF and PMF.

Variable Optical Attenuator (VOA)

Fast attenuation speed with low insertion loss and built-in power monitoring. Operates in fixed attenuation or constant output power modes. Models support SMF, MMF and PMF.

Optical Power Meters

Fast terminating or inline monitoring of optical signal power from -60 to +10 dBm across 750 – 1700 nm wavelengths. Model with logarithmic analog output for applications such as silicon photonics fiber alignment.

Optical Spectrum Analyzer (OSA)

Low cost, fast spectral measurement in a compact module with built-in analysis including SMSR, OSNR and spectral width. Targeted wavelengths for specific applications in O band, C band and L band.

Optical-to-Electrical Converter

High bandwidth, broadband O-to-E converter. Available in a range of configurations; choose from 1 or 2 channels, AC or DC coupling and various conversion gain and operating wavelength ranges.

Bit Error Rate Tester (BERT)

2 or 4-channel Pulse Pattern Generator and Error Detector at rates up to 29 Gbps for the design, characterization and production of optical transceivers and opto-electrical components.

Pulse Pattern Generator (PPG)

4 channel Pulse Pattern Generator from 0.3 to 30 Gbps for high-density multichannel applications. With integrated clock synthesizer and programmable de-emphasis and CTLE processor.

Optical Switch

Proven reliability and fast switching time. Wide variety of switch configurations: 1x4, 1x16, 16x16 and more. Models support SMF, MMF and PMF.

Polarization Controller & Scrambler

High-speed automated polarization control with broad wavelength coverage from 1260nm to 1650nm, low insertion loss and back reflection. Full remote control via intuitive GUI, LabVIEW or SCPI.

Photonic Doppler Velocimeter (PDV)

Purpose-built module for Photonic Doppler Velocimetry (PDV). A circulator, two VOAs and a passive coupler all built into one compact module.

Passive Component Integration

Integrate passive optical components of your choice such as WDM couplers, splitters, band-pass filters, PM beamsplitters and circulators. Models support SMF, MMF and PMF.

Passive Component Storage

Protect and store your own passive fiber optic components such as splitters, connector adaptor patchcords, WDM couplers, and isolators in one handy module.

PXI – TEST MODULES

MATRIQ – TEST MODULES

We provide these products as PXIe modules and compact MATRIQ benchtop instruments.

See our website for more details
[quantifiphotonics.com/products](https://www.quantifiphotonics.com/products)

Test. Measure. Solve.

Quantifi Photonics is transforming the world of photonics test and measurement. Our portfolio of optical and electrical test instruments is rapidly expanding to meet the needs of engineers and scientists around the globe. From enabling ground-breaking experiments to driving highly efficient production testing, you'll find us working with customers to solve complex problems with experience and innovation.

To find out more, get in touch with us today.

General Enquiries
Technical Support
Phone
North America

sales@quantifiphotonics.com
support@quantifiphotonics.com
+64 9 478 4849
+1-800-803-8872



quantifiphotonics.com



Contact in France :

WAVETEL PARIS | RENNES | LARMOR-PLAGE | LANNION
sales@wavetel.fr - www.wavetel.fr - +33(0)2 99 14 69 65

**QUANTIFI
PHOTONICS™**