

Features

- * All-fiber technology
- * Up to 15W optical output power
- * 1550nm wavelength
- * CW or pulsed mode
- * High output power stability
- * Maintenance free
- * Compact package
- * No water cooling
- * RS232 interface for local supervision
- * Collimator and Isolator are optional



Applications

- * Laser marking
- * LIDAR
- * Instrumentation
- * Sensing

Description

GIP Technology FLM or FLU series are high-power fiber laser modules operating around 1.5 μ m wavelength. Based on proprietary all-fiber technology, they have been designed as a robust, compact, and reliable laser sources with actively air-cooled and maintenance-free operation.

The flexible package (module

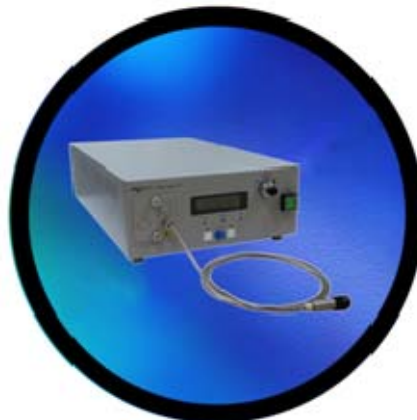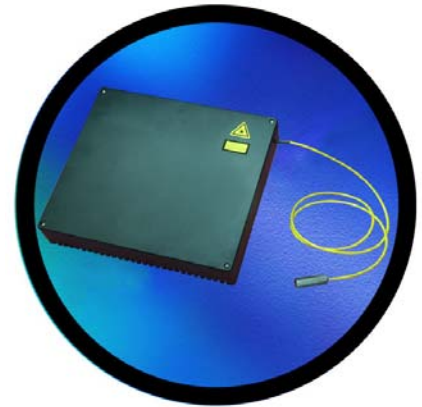

or unit) and operational mode (CW or pulsed) of laser modules are useful in a variety of marking systems, military, research, and medical applications. With built-in controlled electronics, these laser modules can be effectively controlled and monitored by RS232 interface.

1.5 μ m Fiber Laser CW Mode

Specifications

Optical Information		Unit	Description	
			FLM	FLU
Mode of operation			CW	
Center wavelength		nm	1530 ~ 1565	
Emission bandwidth(FWHM)	Max.	nm	5	
Total output power	Max.	W	5	
Output power tunability		%	10~100	
Output power stability *	Max.	dB	± 0.1	
Beam quality (M ²)	Max.		1.2	
State of polarization			Random	
Output			Connector or Collimator	
Electrical Information				
Power supply		V	+5, +12 , +24 VDC	110 ~ 220 VAC
Control interface			RS-232	
Environmental Information				
Operating temperature		°C	0 ~ 50 (case)	0 ~ 35
Storage temperature		°C	-20~80	
Relative humidity (non-condense)		%	5~85	
Outline Information				
Physical dimension			19" or Customerized	

* RMS, over 1h@25°C



GIP Technology Corporation
 6F, No. 112, Shin Min. St., Chung Ho Dist., New Taipei City, Taiwan
 Tel: 886-2-82267855 Fax: 886-2-82267955
www.giptek.com e-mail: sales@giptek.com

1.5 μ m Fiber Laser Pulsed Mode

Specifications

Optical Information		Unit	Description	
			FLM	FLU
Mode of operation			Pulsed	
Center wavelength		nm	1550 \pm 5	
Emission bandwidth(FWHM)	Max.	nm	5	
Average output power	Max.	W	5	
Repetition rate		kHz	10~100	
Pulse width		ns	10~100	
Output power tunability		%	10~100	
Output power stability *	Max.	dB	\pm 0.1	
Beam quality M ²	Max.		1.5	
State of polarization			Random	
Output			Connector or Collimator	
Electrical Information				
Power supply		V	+5, +12 , +24 VDC	110 ~ 220 VAC
Control interface			RS-232	
Environmental Information				
Operating temperature		°C	0 ~ 50	0 ~ 35
Storage temperature		°C	-20~80	
Relative humidity (non-condense)		%	5~85	
Outline Information				
Physical dimension			19" or Customized	

* RMS, over 1h@25°C



GIP Technology Corporation
 6F, No. 112, Shin Min. St., Chung Ho Dist., New Taipei City, Taiwan
 Tel: 886-2-82267855 Fax: 886-2-82267955
www.giptek.com e-mail: sales@giptek.com