

# OCI-V Optical Vector Analysis System



## Description

The OCI-V is an optical vector analysis system for loss, dispersion measurement of optical device. Its principle is based on linearly tunable laser and coherent detection technologies. By measuring the Jones matrix of DUT, insertion loss, dispersion, PDL, PMD can be calculated easily and precisely through OCI-V. Based on the unique optical design and the advanced algorithms, fast measurement and self-calibration are the advantages of this system, which makes it an ideal tool for optical vector measurement.

## Features




- Measurement length: 200m
- Self-calibration
- Wavelength: C+L band, O-band
- Various optical parameters can be captured in one second

## Applications

- Planar waveguide device
- Silicon photonics device
- Optical fiber device
- Optical adjustable device, amplifier, filter

## Measurement Parameters

- Insertion loss
- Group delay
- Chromatic delay
- Polarization dependent loss
- Polarization mode dispersion
- Jones matrix

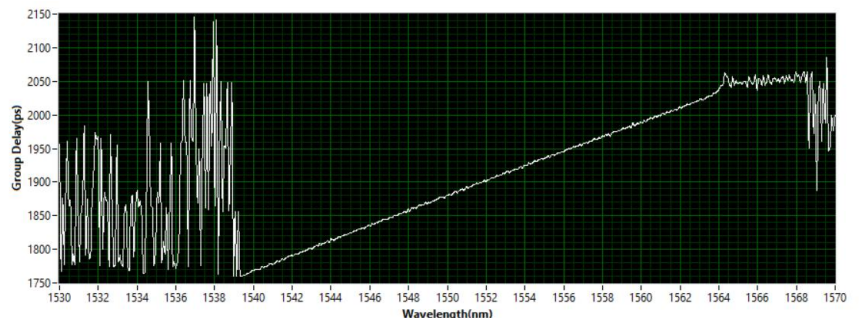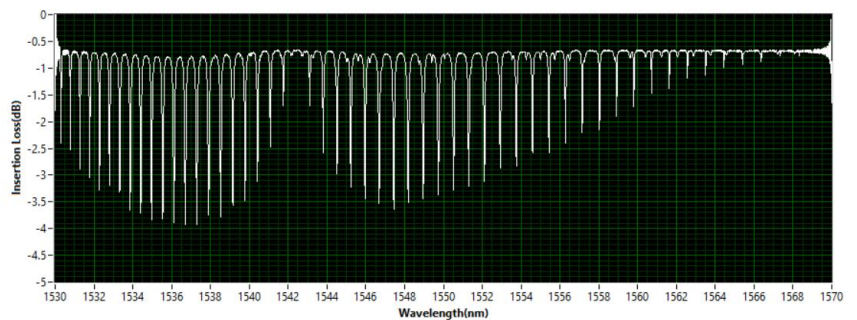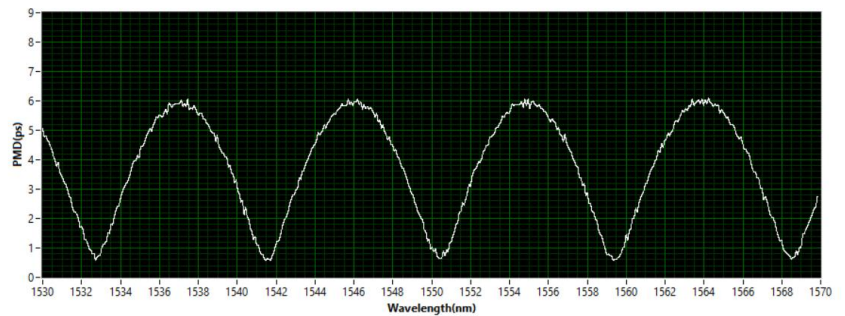

## Parameters

Parameters		
Measurement length	200	m
Wavelength	C+L band: 1525~1625; O band: 1265~1345	nm
Wavelength resolution	1.6	pm
Wavelength accuracy	$\pm 1.0$	pm
<b>Loss</b>		
Dynamic range	60	dB
Insertion loss accuracy	$\pm 0.1$	dB
Resolution	$\pm 0.05$	dB
<b>Group delay</b>		
Range	6	ns
Accuracy	$\pm 0.2$	ps
Loss rang	45	dB
<b>Chromatic dispersion</b>		
Accuracy	$\pm 10$	ps/nm
<b>PDL</b>		
Dynamic range	40	dB
Accuracy	$\pm 0.05$	dB
<b>PMD</b>		
Range	6	ns
Accuracy	$\pm 0.1$	ps
Loss range	40	dB
<b>Hardware</b>		
Power	60	W
Communicaiton interface	USB	-
Optical fieber connector	FC/APC	-
Dimension	D 330 * W 350 * H 160	mm
Weight	7.5	kg
Storage temperature	0~50	°C
Operating temperature	10~40	°C
Relative humidity	10~90	%RH



Contacter WAVETEL - FRANCE

tel : +33(0)2 99 14 69 65 email : sales@wavetel.fr web : www.wavetel.fr

WAVETEL PARIS | RENNES | LARMOR-PLAGE | LANNION