

# Isotropic measurement of electric fields from 100 kHz to 3 GHz

using the Field Meter FieldMan®

The probe detects electric fields from 100 kHz to 3 GHz, covering the fields that occur in broadcasting, telecoms, and industry. The dynamic range from 0.5 V/m up to 1,300 V/m (68 dB) makes the probe ideal for measuring exposure in both the general public and the occupational environment. The probe is characterized by particularly high power handling and a wide True RMS range.

The probe's interface digitally transmits the measurement data to the base unit, which has no individual influence on the measured values and therefore does not need to be calibrated. The accredited probe calibration is carried out at several frequencies. The calibration data is stored in the probe and is automatically taken into account during the measurement. If the frequency of the predominating field strength is known, a correction factor can additionally be applied to increase the measurement accuracy.

- > General public and occupational field exposure from broadcasting, telecoms and industrial equipment
- > Isotropic (non-directional) measurement 68 dB dynamic range without changing range For high field strengths up to 1300 V/m Digital probe interface - no more meter calibration Self-test of the probe interface with integrated sensor function test Automatic offset correction, no zero adjustment required Temperature compensation of the sensors for minimum drift and wide temperature range down to -20 °C High Immunity at 50/60 Hz Accredited calibration included
- >
- >



# Specifications <sup>1</sup>

Product Features		
Frequency range <sup>2</sup>	100 kHz to 3 GHz	
Type of frequency response	Flat	
Measurement range (nom.)	0.5 to 1300 V/m (CW) 0.5 to 36 V/m (True RMS)	66 nW/cm <sup>2</sup> to 450 mW/cm <sup>2</sup> (CW) 66 nW/cm <sup>2</sup> to 0.35 mW/cm <sup>2</sup> (True RMS)
Dynamic range (nom.)	68 dB	
CW damage level (nom.)	2000 V/m	1000 mW/cm <sup>2</sup>
Peak damage level (nom.) <sup>3</sup>	20 kV/m	100 W/cm <sup>2</sup>
Sensor type	Diode based system	
Directivity	Isotropic (Tri-axial)	
Spatial assessment	3 separate axes	
Sampling rate / integration time (nom.)	5 Hz / 265 ms	
Temperature sensors	Integrated sensors for displaying the ambient temperature, for automatic offset compensation and for compensation of the temperature response	
Self-test	Interface function test and sensor test for short circuit and interruption of diodes	

Uncertainty		
Flatness of frequency response <sup>4,5</sup> <small>Calibration uncertainty not included Referred to 0.2 mW/cm<sup>2</sup> (27.5 V/m)</small>	±1 dB (1 MHz to 300 MHz) +1.4/ -1 dB (300 MHz to 2.45 GHz)	
Linearity deviation (nom.) <small>Referred to 0.2 mW/cm<sup>2</sup> (27.5 V/m @ 1800 MHz)</small>	+2/-3 dB (1 to 2 V/m) ±1 dB (2 to 4 V/m) ±0.5 dB (4 to 400 V/m) ±1 dB (400 to 1300 V/m)	+2/-3 dB (0.265 to 1.06 μW/cm <sup>2</sup> ) ±1 dB (1.06 to 4.25 μW/cm <sup>2</sup> ) ±0.5 dB (4.25 μW/cm <sup>2</sup> to 42 mW/cm <sup>2</sup> ) ±1 dB (42 to 450 mW/cm <sup>2</sup> )
Isotropic deviation <sup>5</sup> <small>Referred to 0.2 mW/cm<sup>2</sup> (27.5 V/m)</small>	±1 dB	
Temperature response (nom.) (see Fig. 1) <small>Referred to 0.2 mW/cm<sup>2</sup> (27.5 V/m @ 100 MHz)</small>	(-20 °C to +50 °C, related to 23 °C)	

General Specifications		
Accredited calibration	DAkKS, ILAC-MRA (DIN EN ISO/IEC 17025, IEEE Std. 1309) For measurands outside the scope, a factory calibration is performed.	
Recommended calibration interval	24 months	
Operating temperature	-20 °C to +50 °C	
Humidity	< 29 g/m <sup>3</sup> (< 93 % RH at +30 °C), non-condensing	
Ingress protection	IP54 (probe screwed on)	
Climatic conditions	Storage	1K5 (IEC 60721-3) -40 °C to +70 °C
	Transport	2K4 (IEC 60721-3) -40 °C to +70 °C
	Operating	7K2 (IEC 60721-3) extended to -20 °C to +50 °C
Size	308 mm x 66 mm Ø	
Weight	< 100 g	
Country of origin	Germany	

<sup>1</sup> Unless otherwise noted specifications apply at reference condition: device in far-field of source, ambient temperature 23±3 °C, relative air humidity 25% to 75%, sinusoidal signal, probe sampling rate 5 Hz.

<sup>2</sup> Cutoff frequency at typ. -3 dB.

<sup>3</sup> Pulse length 1 μsec, duty cycle 1:100.

<sup>4</sup> Frequency response can be compensated for by the use of correction factors stored in the probe memory.

<sup>5</sup> Results are calculated from the maximum and minimum response obtained during the full revolution about the stem of the probe, oriented 54.7° to the electric field vector.

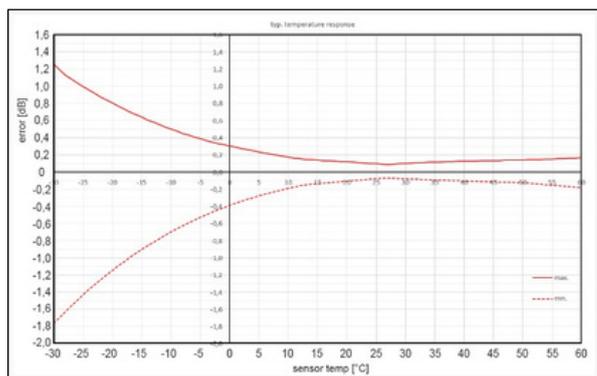


Fig. 1. Typical teperature response EFD-0392

# Definitions and Conditions

## Conditions

Unless otherwise noted, specifications apply after 30 minutes warm-up time within the specified environmental conditions. The product is within the recommended calibration cycle.

### Specifications with limits

These describe product performance for the given parameter covered by warranty. Specifications with limits (shown as <, ≤, >, ≥, ±, max., min.) apply under the given conditions for the product and are tested during production, considering measurement uncertainty.

### Specifications without limits

These describe product performance for the given parameter covered by warranty. Specifications without limits represent values with negligible deviations, which are ensured by design (e.g. dimensions or resolution of a setting parameter).

## Typical values (typ.)

These characterize product performance for the given parameter that is not covered by warranty. When stated as a range or as a limit (shown as <, ≤, >, ≥, ±, max., min.), they represent the performance met by approximately 80% of the instruments. Otherwise, they represent the mean value. The measurement uncertainty is not taken into account.

## Nominal values (nom.)

These characterize expected product performance for the given parameter that is not covered by warranty. Nominal values are verified during product development but are not tested during production.

## Uncertainties

These characterize the dispersion of the values attributed to the measurands with an estimated confidence level of approximately 95%. Uncertainty is stated as the standard uncertainty multiplied by the coverage factor k=2 based on the normal distribution. The evaluation has been carried out in accordance with the rules of the "Guide to the Expression of Uncertainty in Measurement" (GUM).

# Ordering Information

Digital Broadband Probe	Part number
Probe EFD-0392, E-Field, High Power, 100 kHz–3 GHz	2462/12B
Optional Accessories	Part number
Cable, Digital Probe Extension, 2m <sup>6</sup>	2460/90.02

<sup>6</sup> The device specifications apply without an extension cable.

**Narda Safety Test Solutions GmbH**  
Sandwiesenstrasse 7  
72793 Pfullingen, Germany  
Phone +49 7121 97 32 0  
info@narda-sts.com

**Narda Safety Test Solutions**  
NorthAmerica Sales Office  
435 Moreland Road  
Hauppauge, NY11788, USA  
Phone +1 631 231 1700  
info@narda-sts.com

**Narda Safety Test Solutions S.r.l.**  
Via Benessea 29/B  
17035 Cisano sul Neva, Italy  
Phone +39 0182 58641  
nardait.support@narda-sts.it

**Narda Safety Test Solutions GmbH**  
Beijing Representative Office  
Xiyuan Hotel, No. 1 Sanlihe Road, Haidian  
100044 Beijing, China  
Phone +86 10 6830 5870  
support@narda-sts.cn

www.narda-sts.com

® Names and Logo are registered trademarks of Narda Safety Test Solutions GmbH - Trade names are trademarks of the owners.